




Accentuation
Meet the demand of accent lighting.



Pendant downlights
Narrow to very wide beam, rotationally symmetrical light distribution for the illumination of large areas from a short distance.

LED
Wattage:6-37.8W
Lumen:583-4968lm
Light distribution:
Narrow
Medium
Flood

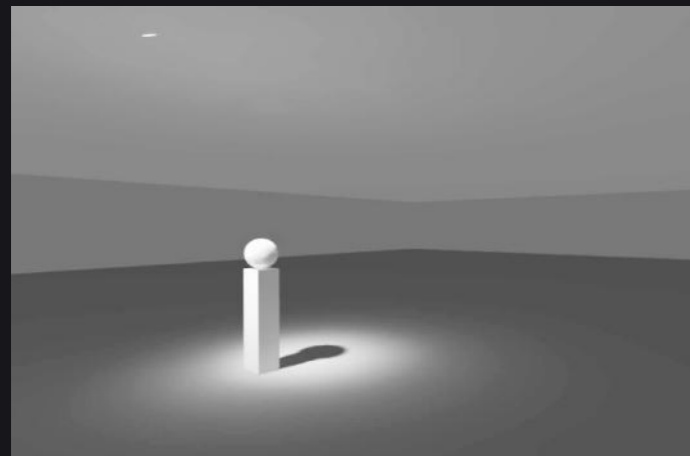

EGG Spot an classical egg shape design consisting of very soft design that blends into the design of any space without interfering the interior design. It is able to downplay its own presence by highlight object efficiently with high-quality focus effect. The reflector of the series was developed to suit numbers of LED light source, accessories and beam angles. The simple design ensure these spot lights don't detract the beauty of the surrounding environment.



Suitable for indoor use

IP20

Protection level is IP20

High efficiency Reflector

High efficiency Reflector



Comply with CE certification



The electrical grade is class2



CRI > 80 (standard)
CRI > 90 (optional)


EGG SMALL SERIES
LED TRACK SPOT LIGHT

80




IP20 | CE | CB | | |

Body: Die-cast aluminium
Housing: Die-cast aluminium
Optic: High efficiency Reflector
Weight: 0.56kg
CTN: 18PCS



White Black Silver

| ORDERING CODE | Power (W) | Beam Angle (°) | CCT (K) | Hot Lumen (Lm) | LOR (%) | UGR | On/Off | DRIVER 1-10V | DALI | Triac |
|------------------|-----------|----------------|---------|----------------|---------|-----|--------|--------------|------|-------|
| EGL800-W/B/S-830 | | | 3000 | 1429 | | | | | | |
| EGL800-W/B/S-840 | 16 | 14 | 4000 | 1521 | 86% | <19 | ✓ | ✓ | ✓ | ✓ |
| EGL800-W/B/S-850 | | | 5000 | 1552 | | | | | | |
| EGL801-W/B/S-830 | | | 3000 | 1410 | | | | | | |
| EGL801-W/B/S-840 | 16 | 20 | 4000 | 1503 | 86% | <19 | ✓ | ✓ | ✓ | ✓ |
| EGL801-W/B/S-850 | | | 5000 | 1534 | | | | | | |
| EGL802-W/B/S-830 | | | 3000 | 1353 | | | | | | |
| EGL802-W/B/S-840 | 16 | 28 | 4000 | 1468 | 82% | <19 | ✓ | ✓ | ✓ | ✓ |
| EGL802-W/B/S-850 | | | 5000 | 1498 | | | | | | |

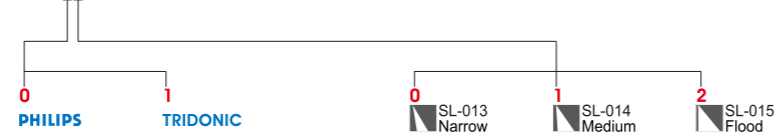


PHILIPS SLM C 830 1204 L12 G1 3000K

| Beam Angle | h(m) | E(lx) | D(mm) |
|------------|------|-------|-------|
| 14° | 1.0 | 9580 | 240 |
| | 2.0 | 2390 | 480 |
| | 3.0 | 1064 | 710 |
| 20° | 1.0 | 5971 | 370 |
| | 2.0 | 1492 | 740 |
| | 3.0 | 663 | 1110 |
| 28° | 1.0 | 3938 | 490 |
| | 2.0 | 984 | 980 |
| | 3.0 | 437 | 1470 |


EGG MEDIUM SERIES
LED TRACK SPOT LIGHT

100

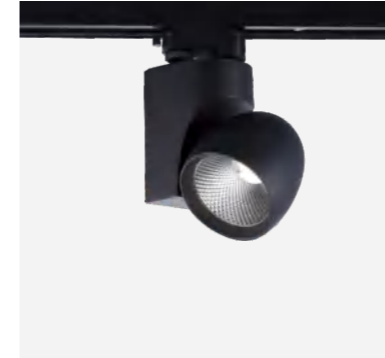


IP20 | CE | CB | | |

Body: Die-cast aluminium
Housing: Die-cast aluminium
Optic: High efficiency Reflector
Weight: 0.95kg
CTN: 12PCS



White Black Silver

| ORDERING CODE | Power (W) | Beam Angle (°) | CCT (K) | Hot Lumen (Lm) | LOR (%) | UGR | On/Off | DRIVER 1-10V | DALI | Triac |
|-------------------|-----------|----------------|---------|----------------|---------|-----|--------|--------------|------|-------|
| EGL1000-W/B/S-830 | | | 3000 | 2553 | | | | | | |
| EGL1000-W/B/S-840 | 32 | 12 | 4000 | 2698 | 84% | <19 | ✓ | ✓ | ✓ | ✓ |
| EGL1000-W/B/S-850 | | | 5000 | 2752 | | | | | | |
| EGL1001-W/B/S-830 | | | 3000 | 2492 | | | | | | |
| EGL1001-W/B/S-840 | 32 | 20 | 4000 | 2634 | 82% | <19 | ✓ | ✓ | ✓ | ✓ |
| EGL1001-W/B/S-850 | | | 5000 | 2687 | | | | | | |
| EGL1002-W/B/S-830 | | | 3000 | 2462 | | | | | | |
| EGL1002-W/B/S-840 | 32 | 26 | 4000 | 2602 | 81% | <19 | ✓ | ✓ | ✓ | ✓ |
| EGL1002-W/B/S-850 | | | 5000 | 2654 | | | | | | |

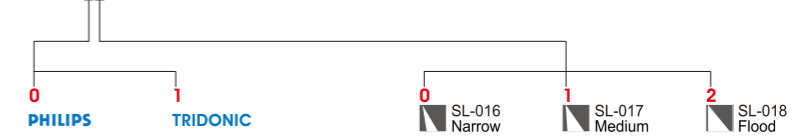

PHILIPS SLM C 830 1205 L12 G1 3000K

| Beam Angle | h(m) | E(lx) | D(mm) |
|------------|------|-------|-------|
| 12° | 1.0 | 27228 | 210 |
| | 2.0 | 6807 | 410 |
| | 3.0 | 3025 | 620 |
| 20° | 1.0 | 13046 | 340 |
| | 2.0 | 3261 | 680 |
| | 3.0 | 1449 | 1010 |
| 26° | 1.0 | 7676 | 470 |
| | 2.0 | 1919 | 940 |
| | 3.0 | 852 | 1400 |