




LINEAR TRACK SERIES
LED TRACK SPOT LIGHT

LINEAR TRACK SERIES

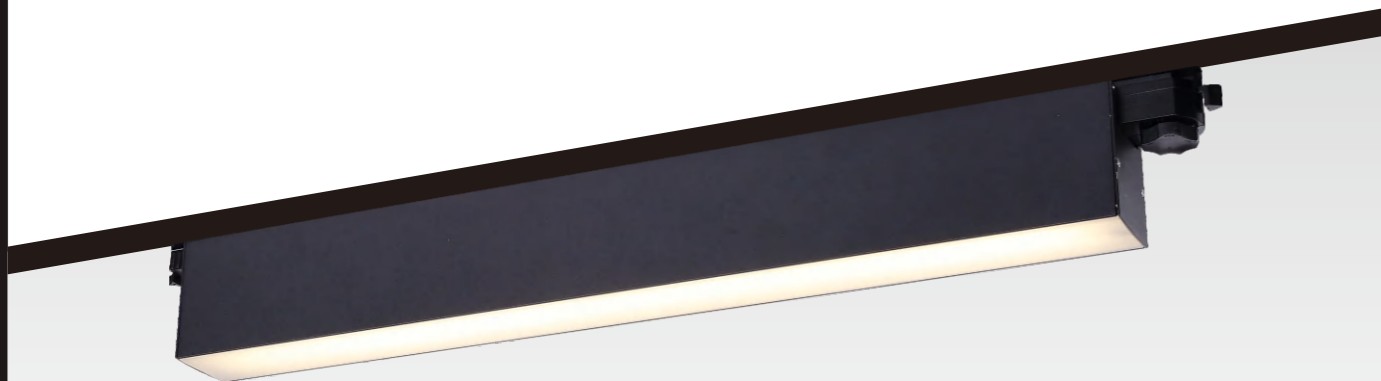

Product features

An simple linear light that fixed into an track that gives uniform lights. LINEAR series design to combine track spots that give accent lighting that mixed of basic lighting. The simple design ensure these spot lights don't detract the beauty of the surrounding environment.

Range of Application

Commercial
Architectoral
Museum / Art gallery



LINEAR TRACK SERIES
LED TRACK SPOT LIGHT



Accentuation
Emphasis of objects or architectural elements.



Track spotlights
narrow to wide beam, Rotateally symmetrical light distribution for accent lighting.

LED
Wattage:22-50W
Lumen:1407-3500lm
Light distribution:
Narrow
Medium
Flood



Suitable for indoor use

IP20

Protection level is IP20



High efficiency PMMA
High efficiency PMMA



Comply with CE certification



The electrical grade is class1



High CRI
CRI > 80 (standard)
CRI > 90 (optional)


LINEAR TRACK SERIES
LED TRACK SPOT LIGHT

50X540



IP20 | CE | CB |

Body: Die-cast aluminium
Housing: Die-cast aluminium
Optic: PMMA
Weight: 0.78kg
CTN: 1PCS



White
 Black
 Silver

ORDERING CODE	Power (W)	Beam Angle (°)	CCT (K)	Hot Lumen (Lm)	LOR (%)	UGR	On/Off	DRIVER 1-10V	DALI	Triac
PL600-W/B/S-830			3000	1578						
PL600-W/B/S-840	32	100	4000	1718	52%	<19	✓	✓	✓	✓
PL600-W/B/S-850			5000	1827						

BRIDGELUX 3000K

h(m)	E(lx)	D(mm)
		100°
1.0	616	2390
2.0	154	4780
3.0	68	7170


LINEAR TRACK SERIES
LED TRACK SPOT LIGHT

50X1140



IP20 | CE | CB |

Body: Die-cast aluminium
Housing: Die-cast aluminium
Optic: PMMA
Weight: 0.84kg
CTN: 1PCS



White
 Black
 Silver

ORDERING CODE	Power (W)	Beam Angle (°)	CCT (K)	Hot Lumen (Lm)	LOR (%)	UGR	On/Off	DRIVER 1-10V	DALI	Triac
PL1200-W/B/S-830			3000	3114						
PL1200-W/B/S-840	60	100	4000	3268	52%	<19	✓	✓	✓	✓
PL1200-W/B/S-850			5000	3379						

BRIDGELUX 3000K

h(m)	E(lx)	D(mm)
		100°
1.0	1208	2290
2.0	306	4470
3.0	128	7060

