




Accentuation
Meet the demand of accent lighting.



Pendant downlights
Narrow to very wide beam, rotationally symmetrical light distribution for the illumination of large areas from a short distance.

LED
Wattage:4.5-6W
Lumen:250-461lm
Light distribution:
Narrow
Medium
Flood



Suitable for indoor use

IP20

Protection level is IP20

High efficiency Lens

High efficiency Lens



Comply with CE certification



The electrical grade is class2



CRI > 80 (standard)
CRI > 90 (optional)




**SMALL EYE SERIES
LED PENDANTS**



IP20 | CE | CB |

Ceiling rose: Steel / steel wire rope
Body: Die-cast aluminium
Housing: aluminium
Optic: High efficiency Lens
Weight: 0.37kg
CTN: 25PCS

White Black Silver



ORDERING CODE	Power (W)	Beam Angle (°)	CCT (K)	Hot Lumen (Lm)	LOR (%)	UGR	On/Off	DRIVER 1-10V	DALI	Triac
EP2500-W/B/S-830	4.5	25	3000	250	80%	<19	✓	✓	✓	✓
EP2500-W/B/S-840			4000	252						
EP2500-W/B/S-850			5000	255						
EP2501-W/B/S-830	4.5	40	3000	300	80%	<19	✓	✓	✓	✓
EP2501-W/B/S-840			4000	305						
EP2501-W/B/S-850			5000	310						



CREE

3000K

h(m)	E(lx)	D(mm)	h(m)	E(lx)	D(mm)
25°					
1.0	1069	380	1.0	595	690
2.0	267	760	2.0	148	1380
3.0	118	1130	3.0	66	2070




**MEDIUM EYE SERIES
LED PENDANTS**




IP20 | CE | CB |

Ceiling rose: Steel / steel wire rope
Body: Die-cast aluminium
Housing: aluminium
Optic: High efficiency reflector
Weight: 0.64kg
CTN: 25PCS

White Black Silver



ORDERING CODE	Power (W)	Beam Angle (°)	CCT (K)	Hot Lumen (Lm)	LOR (%)	UGR	On/Off	DRIVER 1-10V	DALI	Triac
EP4000-W/B/S-830	6	16	3000	461	86%	<19	✓	✓	✓	✓
EP4000-W/B/S-840			4000	482						
EP4000-W/B/S-850			5000	497						
EP4001-W/B/S-830	6	21	3000	442	83%	<19	✓	✓	✓	✓
EP4001-W/B/S-840			4000	463						
EP4001-W/B/S-850			5000	488						
EP4002-W/B/S-830	6	30	3000	453	85%	<19	✓	✓	✓	✓
EP4002-W/B/S-840			4000	477						
EP4002-W/B/S-850			5000	495						

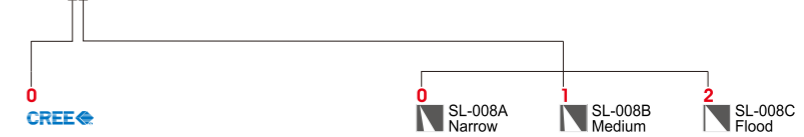


CREE CXA1304

3000K

h(m)	E(lx)	D(mm)	h(m)	E(lx)	D(mm)	h(m)	E(lx)	D(mm)
16°								
1.0	3191	280	1.0	1812	400	1.0	1330	540
2.0	797	570	2.0	453	800	2.0	332	1080
3.0	354	850	3.0	201	1200	3.0	147	1620


**SMALL EYE TRACK MOUNT SERIES
LED PENDANTS**

25

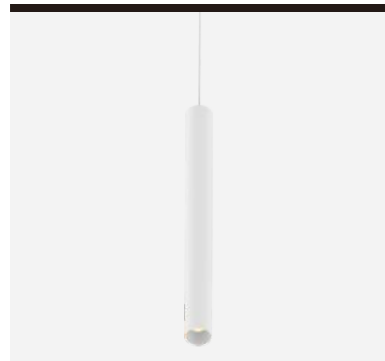

IP20 | CE | CB | □ | 3 | 🏠

Body: Die-cast aluminium
Housing: aluminium
Optic: High efficiency Lens
Weight: 0.39kg
CTN: 25PCS



ORDERING CODE	Power (W)	Beam Angle (°)	CCT (K)	Hot Lumen (Lm)	LOR (%)	UGR	On/Off	DRIVER 1-10V	DALI	Triac
EPT2500-W/B/S-830			3000	250						
EPT2500-W/B/S-840	4.5	25	4000	252	80%	<19	✓	✓	✓	✓
EPT2500-W/B/S-850			5000	255						
EPT2501-W/B/S-830			3000	300						
EPT2501-W/B/S-840	4.5	40	4000	305	80%	<19	✓	✓	✓	✓
EPT2501-W/B/S-850			5000	310						



CREE 3000K

h(m)	E(lx)	D(mm)	h(m)	E(lx)	D(mm)
25°			40°		
1.0	1069	380	1.0	595	690
2.0	267	760	2.0	148	1380
3.0	118	1130	3.0	66	2070


**MEDIUM EYE TRACK MOUNT SERIES
LED PENDANTS**

40




IP20 | CE | CB | □ | 3 | 🏠

Trim: Die-cast aluminium
Body: Die-cast aluminium
Housing: aluminium
Optic: High efficiency reflector
Weight: 0.66kg
CTN: 25PCS



ORDERING CODE	Power (W)	Beam Angle (°)	CCT (K)	Hot Lumen (Lm)	LOR (%)	UGR	On/Off	DRIVER 1-10V	DALI	Triac
EPT4000-W/B/S-830			3000	461						
EPT4000-W/B/S-840	6	16	4000	482	86%	<19	✓	✓	✓	✓
EPT4000-W/B/S-850			5000	497						
EPT4001-W/B/S-830			3000	442						
EPT4001-W/B/S-840	6	21	4000	463	83%	<19	✓	✓	✓	✓
EPT4001-W/B/S-850			5000	488						
EPT4002-W/B/S-830			3000	453						
EPT4002-W/B/S-840	6	30	4000	477	85%	<19	✓	✓	✓	✓
EPT4002-W/B/S-850			5000	495						

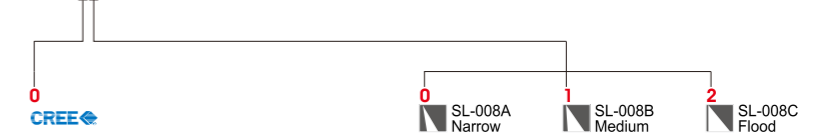

CREE CXA1304 3000K

h(m)	E(lx)	D(mm)	h(m)	E(lx)	D(mm)	h(m)	E(lx)	D(mm)
16°			21°			30°		
1.0	3191	280	1.0	1812	400	1.0	1330	540
2.0	797	570	2.0	453	800	2.0	332	1080
3.0	354	850	3.0	201	1200	3.0	147	1620