

I-WORK FREE STAND DIRECT / INDIRECT LED WORK LIGHTS



Product features

I-Work lights cover the full lighting requirements for productive working with direct and indirect illumination :

Excellent glare control UGR<19, Daylight sensor - Motion sensor and continuous dali dimming. The use of modern photometric simulations in the development ensures outstanding light quality with excellent uniformity and efficient glare control, and the sealed optical systems reduce the cleaning requirement and provide for low-maintenance operation.

The actual projection fields, with anti-glare elements, diffused reflections particularly when facing into the luminaire at a very shallow angle, resulting in efficient visual comfort at the workplace.

Range of Application

Commercial
Residential
Architectural
Hospitals



If with insufficient ambient light, the lamp dims to stand-by dimming level(set in the motion sensor)when no motion detected offer hold time, and then switches off after stand-by period.




If with sufficient ambient light, the lamp turns off at once, even with motion trigger.



IP20 | CE | CB | | | |

Body: aluminium
Housing: aluminium
Optic: High efficiency PMMA
Weight: 16.8kg
CTN: 1PCS

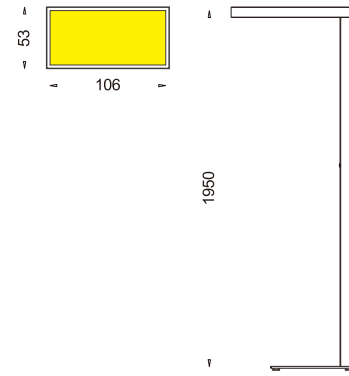

White
 Black
 Silver


ORDERING CODE	Power (W)	Beam Angle (°)	CCT (K)	Hot Lumen (lm)	LOR (%)	UGR	On/Off	DRIVER 1-10V	DALI	Triac
IWORK1000-W/B/S-830	95	90 DOWN	3000	3000	≥85	<19	✓	✓	✓	✓
IWORK1000-W/B/S-840			4000	3200						
IWORK1000-W/B/S-850			5000	3500						
		100 UP	3000	6000						
			4000	6200						
			5000	6500						



BRIDGELUX

3000K

100°			90°		
h(m)	E(lx)	D(mm)	h(m)	E(lx)	D(mm)
1.0	2590	616	1.0	1393	896
2.0	651	1232	2.0	347	1792
3.0	287	1848	3.0	154	2688

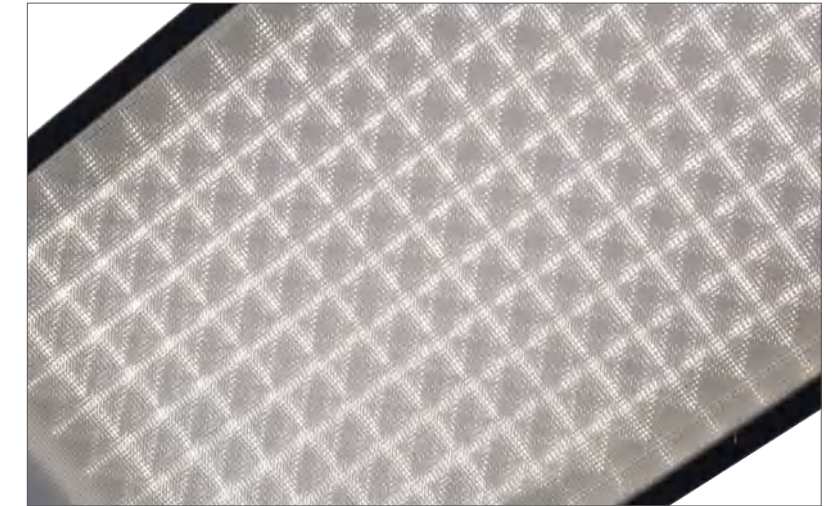

I-Work use premium quality PMMA from Evonic Germany Ensure best light quality with UGR < 19.

